

IEC Appliance Inlet C14 with Filter, Circuit Breaker TA35 (recessed)



Screw-on with IP67



Screw-on A



Screw-on B



See below:
[Approvals and Compliances](#)

Description

- Panel mount :
Screw-on or snap-in mounting front side
- 3 Functions :
Appliance Inlet protection class I or II , Circuit breaker type TA35 2-pole
, Line filter in standard and medical version
- Quick connect terminals 6.3 x 0.8 mm

Unique Selling Proposition

- IP67 protection
- Recessed rocker switch
- Various mounting options
- V-Lock cord retaining

Characteristics

- All single elements are already wired
- Circuit Breaker non-illuminated or illuminated
- Suitable for use in medical equipment according to IEC/UL 60601-1
For applications according IEC/UL 62368-1 we recommend variants with bleed resistor

Other versions on request

- Other rocker marking
- Medical Version (M80)
- Capacitance CX1
- Variants in white
- Filter version with high inductance

References

Alternative: version without line filter [DG11](#)

Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Approvals](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#)

Technical Data

| | |
|---------------------------------|--|
| Ratings IEC | 1 - 10A @ Ta 40 °C / 250 VAC; 50Hz |
| Ratings UL/CSA | 1 - 15A @ Ta 40 °C / 250 VAC; 60Hz |
| Leakage Current | standard < 0.5 mA (250 V / 60Hz) medical < 5 µA (250 V / 60 Hz) |
| Dielectric Strength | > 1.7 kVDC between L-N > 2.7 kVDC between L/N-PE Test voltage (2 sec) |
| Allowable Operation Temperature | -25 °C to 60 °C |
| Climatic Category | 25/060/21 acc. to IEC 60068-1 |
| IP-Protection | front side IP40 / IP65 / IP67 acc. to IEC 60529 |
| Protection Class | Suitable for appliances with protection class I or II acc. to IEC 61140 |
| Terminal | Quick connect terminals 6.3 x 0.8 mm |
| Panel Thickness S | Screw: max 8 mm Mounting screw torque max 0.5 Nm : S =1.0/1.2/1.5/2.0/2.5/3.0 mm |
| Material: Housing | Thermoplastic, black, UL 94V-0 |

| | |
|-------------------------|---|
| Appliance inlet/-outlet | C14 C18 acc. to IEC 60320-1 UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection Class I or II |
| Circuit Breakers | Acc. IEC/EN 60934, UL 1077, CSA 22.2 no. 235 2-pole rocker switch, illuminated or non-illuminated. Optional with undervoltage- or remote trip release Short circuit capacity Icn: 2000 A |
| Line Filter | Standard and Medical Version, IEC 60939, UL 60939-3, CSA C22.2 no. 8 Technical Details |
| MTBF | > 100'000h acc. to MIL-HB-217 F |




Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.








Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.
 Approval Reference Type: DG12

| Approval Logo | Certificates | Certification Body | Description |
|--|---------------|--------------------|--|
|  | VDE Approvals | VDE | Certificate Number: 40049092 |
|  | UL Approvals | UL | UL File Number: E495089 |
|  | CQC Approvals | CQC | CQC Certificate Number: CQC19001233482 |



Product standards

Product standards that are referenced

| Organization | Design | Standard | Description |
|--|-----------------------|------------------|---|
|  | Designed according to | IEC 60320-1 | Appliance couplers for household and similar general purposes |
|  | Designed according to | IEC 60939 | Passive filters for suppressing electromagnetic interference |
|  | Designed according to | IEC 61058-1 | Switches for appliances. Part 1. General requirements |
|  | Designed according to | UL 498 | Standard for Attachment Plugs and Receptacles |
|  | Designed according to | UL 60939-3 | Electromagnetic interference filters |
|  | Designed according to | CSA C22.2 no. 42 | General Use Receptacles, Attachment Plugs, and Similar Wiring Devices |
|  | Designed according to | CSA C22.2 no. 8 | Electromagnetic interference (EMI) filters |







Application standards

Application standards where the product can be used


| Organization | Design | Standard | Description |
|--|--------------------------------|----------------|--|
|  | Designed for applications acc. | IEC/UL 62368-1 | IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment. |
|  | Designed for applications acc. | IEC 60601-1 | Medical electrical equipment - Part 1: General requirements for basic safety and essential performance |

Compliances


The product complies with following Guide Lines

| Identification | Details | Initiator | Description |
|--|------------------------------|-------------|--|
|  | CE declaration of conformity | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | RoHS | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863 |
|  | China RoHS | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS. |
|  | REACH | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force. |
|  | | SCHURTER AG | V-Lock system are based on a matching plug-dose combination. The connector is equipped with a notch intended for use with the latching cordset. The cord latching system prevents against accidental removal of the cordset. |
|  | Medical Equipment | SCHURTER AG | Suitable for use in medical equipment according to IEC/UL 60601-1 |


Dimension [mm]
 Snap-in version IP40

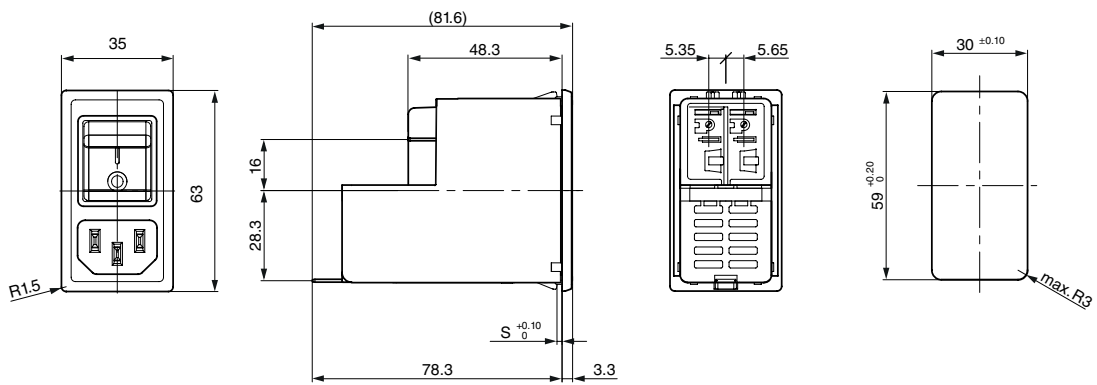


Screw-on A

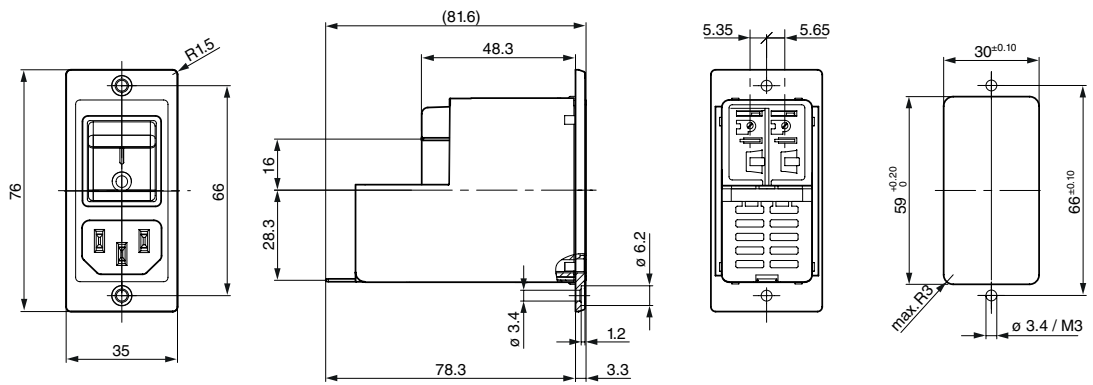

Screw-on B

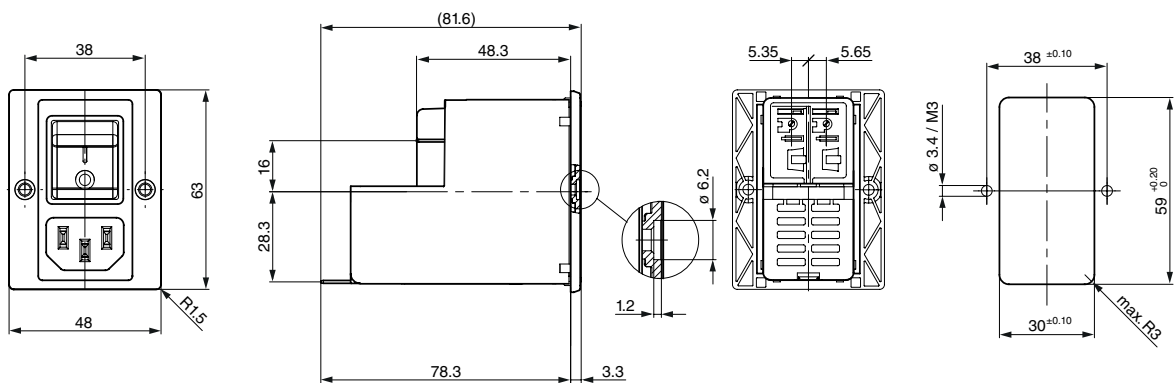

Screw-on with IP67

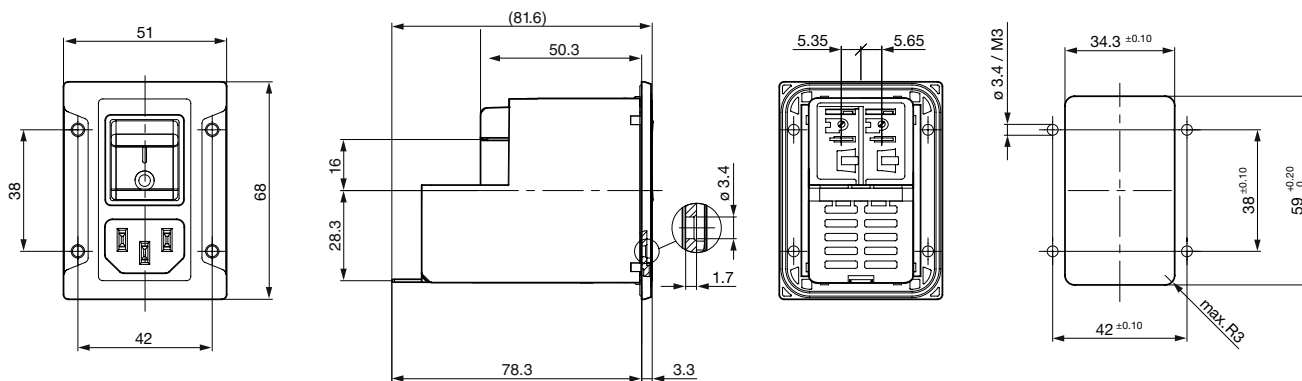


Technical Data of Filter-Components

| Rated Current [A] | Filter-Type | Inductances L [mH] | Capacitance CX [nF] | Capacitance CY [nF] | R [MΩ] |
|-------------------|---|--------------------|---------------------|---------------------|--------|
| 1 | Standard version | 2 x 12 | 220 | 2.2 | 1 |
| 2 | Standard version | 2 x 5.2 | 220 | 2.2 | 1 |
| 3 | Standard version | 2 x 4 | 220 | 2.2 | 1 |
| 4 | Standard version | 2 x 2 | 220 | 2.2 | 1 |
| 6 | Standard version | 2 x 0.8 | 220 | 2.2 | 1 |
| 8 | Standard version | 2 x 0.6 | 220 | 2.2 | 1 |
| 10 | Standard version | 2 x 0.4 | 220 | 2.2 | 1 |
| 15 | Standard version | 2 x 0.1 | 220 | 2.2 | 1 |
| 10 | Standard version with high inductance | 2 x 0.65 | 220 | 2.2 | 1 |
| 15 | Standard version with high inductance | 2 x 0.2 | 220 | 2.2 | 1 |
| 10 | Medical Version (M5) | 2 x 0.4 | 220 | - | 1 |
| 15 | Medical Version (M5) | 2 x 0.1 | 220 | - | 1 |
| 10 | Medical version (M5) with high inductance | 2 x 0.65 | 220 | - | 1 |
| 15 | Medical version (M5) with high inductance | 2 x 0.2 | 220 | - | 1 |


Diagrams

Standard Version, medical Version M80

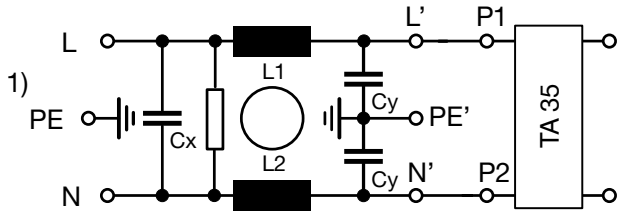


1) Line, 2) Load

Medical version M5, protection class I

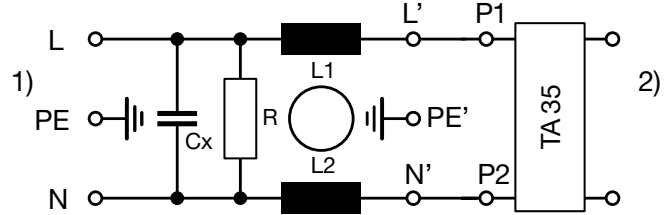

1) Line, 2) Load

Medicalversion (M5), Protection Class II

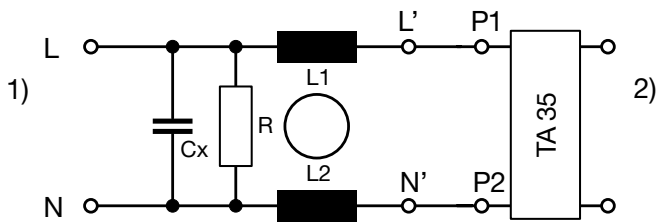


1) Line
2) Load

Attenuation Loss


- - - 50Ω differential mode _____ 50Ω common mode

Standard version


1 A




2 A




3 A




4 A




6 A




8 A




10 A



15 A



Medical version (M5)

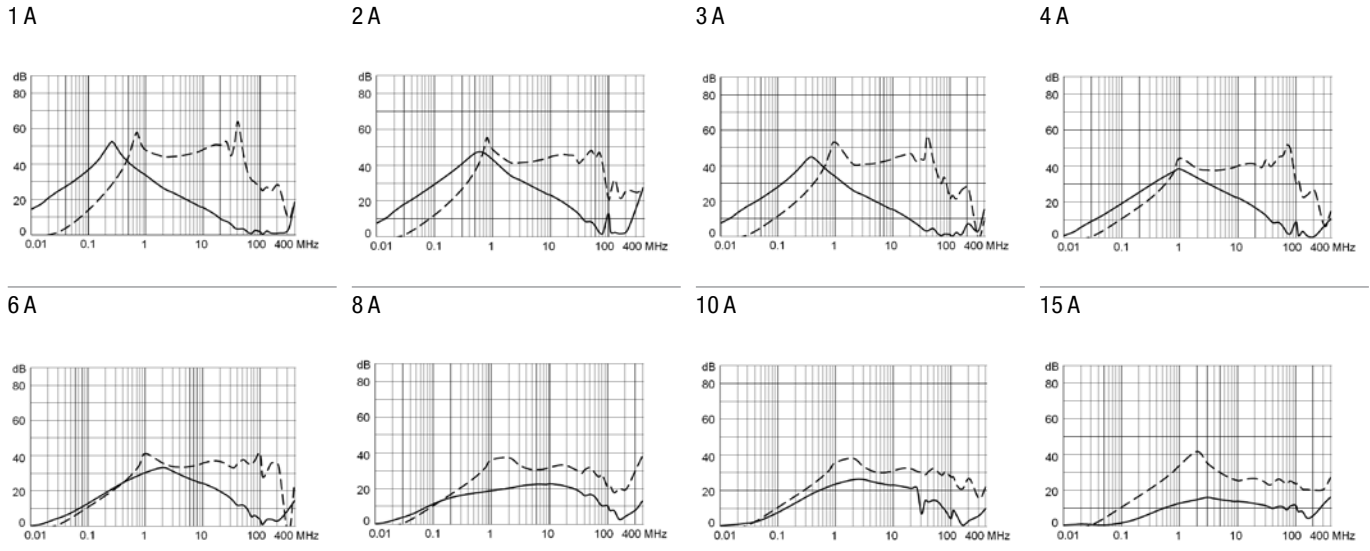


Effect of ambient temperature

| Ambient Temperature [°C] | Correction factor |
|--------------------------|-------------------|
| -30 | 0.76 |
| -20 | 0.81 |
| 0 | 0.90 |
| +23 | 1.00 |
| +40 | 1.03 |
| +50 | 1.04 |
| +60 | 1.06 |

Time-Current-Curves


Tripping Characteristics $I_n < 3 A$

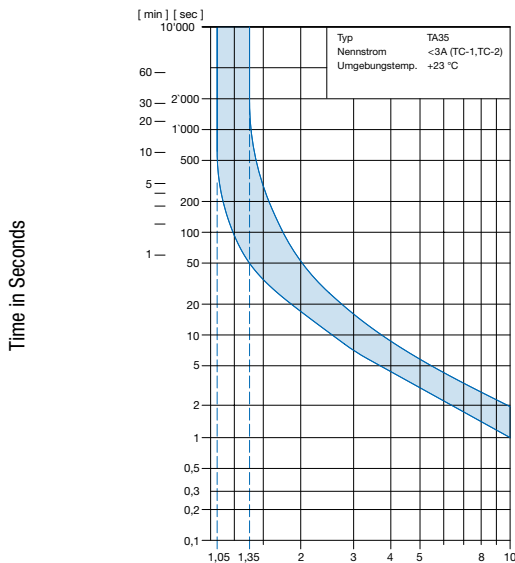

Multiple of Rated Current I_n

Reference Temperature +23°

Tripping Characteristics $I_n \geq 3 \dots \leq 15 A$

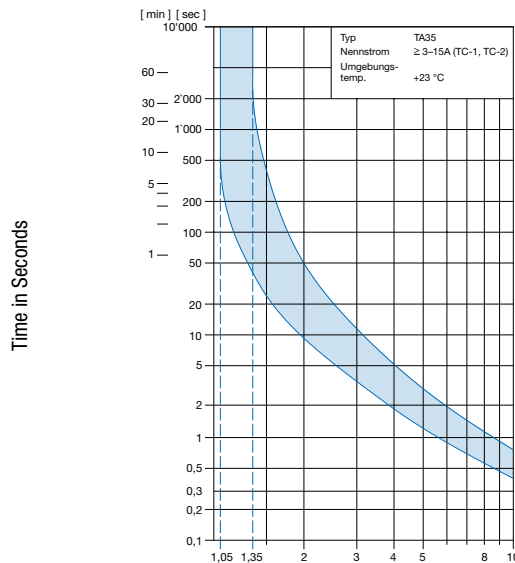

Multiple of Rated Current I_n

Reference Temperature +23°

Configuration Code

| Type | Configuration Code TA35 | | | | | | | |
|------|-------------------------|---|---|---|---|---|---|-----|
| DG12 | CBDWM100C0-000-C6135 | X | X | X | X | X | X | 0 0 |

Customer specific type

Color

- 0 Black
- 1 White

3)

Panel Mounting

- 00 Screw version A front mounting
- 01 Screw version B front mounting
- 10 Snap-in 1.0 mm
- 12 Snap-in 1.2 mm
- 15 Snap-in 1.5 mm
- 20 Snap-in 2.0 mm
- 25 Snap-in 2.5 mm
- 30 Snap-in 3.0 mm
- 88 Screw version front mounting (sealed towards housing, IP67)

1)

Terminal PE

- 0 Without (PCII)
- 1 QC 6.3x0.8 mm

Type of mains filter (inductance)

- 0 standard inductance
- 1 higher inductance

Type of mains filter (capacitor)

- 1 standard X2=100nF, Y2=2200pF
- 2 standard X2=220nF, Y2=2200pF
- 3 standard X1=47nF, Y1=2200pF
- 4 medical M5 X2=100nF
- 5 medical M5 X2=220nF
- 6 medical M5 X1=47nF
- 7 medical M80 X2=100nF, Y2=470pF
- 8 medical M80 X2=220nF, Y2=470pF
- 9 medical M80 X1=47nF, Y1=470pF

Type of mains filter (rated current)

- 1 1A
- 2 2A
- 3 3A
- 4 4A
- 5 6A
- 6 8A
- 7 10A
- 8 15A (UL), 10A (IEC), 10A (GB)

2)

Configuration Code TA35


See configuration code of TA35 rocker 2pole

2)

1)



Screw version A



Screw version B

2)

The rated current of the line-filter must not be exceeded in the end application.

3)

Only on request (approvals pending)

Configuration Code

| Type | Configuration Code TA35 | | | | | | |
|------|-------------------------|---|---|---|---|---|-----|
| DG12 | CBDWM100C0-000-C6135 | X | X | X | X | X | 0 0 |

Customer specific type

Color

- 0 Black
- 1 White

3)

Panel Mounting

- 00 Screw version A front mounting
- 01 Screw version B front mounting
- 10 Snap-in 1.0 mm
- 12 Snap-in 1.2 mm
- 15 Snap-in 1.5 mm
- 20 Snap-in 2.0 mm
- 25 Snap-in 2.5 mm
- 30 Snap-in 3.0 mm
- 88 Screw version front mounting (sealed towards housing, IP67)

1)

Terminal PE

- 0 Without (PCII)
- 1 QC 6.3x0.8 mm

Type of mains filter (inductance)

- 0 standard inductance
- 1 higher inductance

Type of mains filter (capacitor)

- 1 standard X2=100nF, Y2=2200pF
- 2 standard X2=220nF, Y2=2200pF
- 3 standard X1=47nF, Y1=2200pF
- 4 medical M5 X2=100nF
- 5 medical M5 X2=220nF
- 6 medical M5 X1=47nF
- 7 medical M80 X2=100nF, Y2=470pF
- 8 medical M80 X2=220nF, Y2=470pF
- 9 medical M80 X1=47nF, Y1=470pF

Type of mains filter (rated current)

- 1 1A
- 2 2A
- 3 3A
- 4 4A
- 5 6A
- 6 8A
- 7 10A
- 8 15A (UL), 10A (IEC), 10A (GB)


2)

Configuration Code TA35

See configuration code of TA35 rocker 2pole

2)

1)



Screw version A

Screw version B

- 2) The rated current of the line-filter must not be exceeded in the end application.
- 3) Only on request (approvals pending)


ORDER CODE

Table 1 Selection for type TA35

Order example

| Number of switched poles Number of protected poles | | 2-pole | |
|---|----------------------------|--------------------------|--------------------------|
| | | 1 | 2 |
| | | | |
| Switch | without illumination | CBT | CBD |
| Switch | illuminated 240 V 120 V | C12 C14 | C32 C34 |

Other versions on request

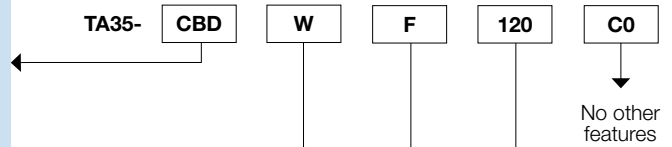

Colours

| | Switch front | Rocker | |
|----------|--------------|-----------------|--------------------|
| | | non-illuminated | illuminated |
| W | black | white | – |
| B | black | black | – |
| 3 | black | – | red transparent |
| 4 | black | – | green transparent |
| 6 | black | – | orange transparent |


Other colours on request

Rocker legend

| | Surface | Illustration | | Colour of print |
|----------|----------|--------------|-----|-----------------|
| | | ON | OFF | |
| F | embossed | – | o | |
| H | printed | ON | OFF | white |
| K | printed | ON | OFF | black |
| L | printed | – | o | white |
| M | printed | – | o | black |

Other legends on request

Position of the rocker legend e.g. I / O



Rated current I_n (A)

| I _n | Code | I _n | Code |
|----------------|------------|----------------|-------------|
| 1,0 | J10 | 8,0 | 080 |
| 2,0 | J20 | 10,0 | 100 |
| 4,0 | 040 | 12,0 | 120* |
| 5,0 | 050 | 15,0 | 150* |
| 6,0 | 060 | | |



Other rated currents on request

*) UL / CSA only


ORDER CODE

Table 1 Selection for type TA35

Order example

| Number of switched poles Number of protected poles | | 2-pole | |
|---|----------------------------|---|---|
| | | 1 | 2 |
| | |  |  |
| Switch | without illumination | CBT | CBD |
| Switch | illuminated 240 V 120 V | C12 C14 | C32 C34 |

Other versions on request




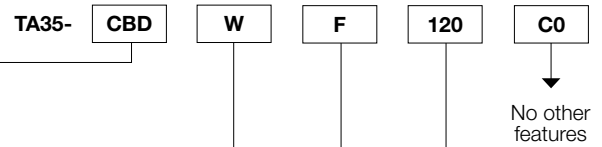



Colours

| | Switch front | Rocker | |
|----------|--------------|-----------------|--------------------|
| | | non-illuminated | illuminated |
| W | black | white | – |
| B | black | black | – |
| 3 | black | – | red transparent |
| 4 | black | – | green transparent |
| 6 | black | – | orange transparent |


Other colours on request

Rocker legend

| | Surface | Illustration | Colour of print |
|----------|----------|---|-----------------|
| F | embossed |  | 0 |
| H | printed |  | white |
| K | printed |  | black |
| L | printed |  | white |
| M | printed |  | black |

Other legends on request

Position of the rocker legend e.g. I / O



Rated current I_n (A)

| I_n | Code | I_n | Code |
|-------|------------|-------|-------------|
| 1,0 | J10 | 8,0 | 080 |
| 2,0 | J20 | 10,0 | 100 |
| 4,0 | 040 | 12,0 | 120* |
| 5,0 | 050 | 15,0 | 150* |
| 6,0 | 060 | | |

Other rated currents on request *) UL / CSA only

Variants

| Rated Current [A] | Circuit Breaker | | Filter | | Protection Class | Connector | | | Order Number |
|-------------------|-----------------|-----------------|-------------------|---|------------------|-----------|-------------|---------------|--------------|
| | Rocker colour | Illumination | Rated Current [A] | Filter Type | | Color | Mounting | IP-Protection | |
| 1 | black | non-illuminated | 1 | Standard version | I | black | Screw-on A | IP40 | 3-108-854 |
| 10 | white | non-illuminated | 10 | Standard version | I | black | Screw-on A | IP40 | 3-109-572 |
| 10 | white | non-illuminated | 10 | Standard version | I | black | Snap-in 1.5 | IP40 | 3-109-575 |
| 10 | white | non-illuminated | 10 | Standard version | I | black | Screw-on B | IP40 | 3-109-698 |
| 10 | white | non-illuminated | 10 | Standard version | I | black | Screw IP67 | IP67 | 3-118-974 |
| 15 | white | non-illuminated | 15 | Standard version | I | black | Screw-on A | IP40 | 3-109-573 |
| 2 | white | non-illuminated | 2 | Standard version | I | black | Screw-on A | IP40 | 3-109-557 |
| 3 | white | non-illuminated | 3 | Standard version | I | black | Screw-on A | IP40 | 3-109-558 |
| 4 | black | non-illuminated | 4 | Standard version | I | black | Screw-on A | IP40 | 3-109-559 |
| 6 | white | non-illuminated | 6 | Standard version | I | black | Screw-on A | IP40 | 3-109-560 |
| 8 | white | non-illuminated | 8 | Standard version | I | black | Screw-on A | IP40 | 3-109-561 |
| 10 | white | non-illuminated | 10 | Standard version with high inductance | I | black | Screw-on A | IP40 | 3-109-602 |
| 15 | white | non-illuminated | 15 | Standard version with high inductance | I | black | Screw-on A | IP40 | 3-109-603 |
| 10 | white | non-illuminated | 10 | Medical Version (M5) | I | black | Screw-on A | IP40 | 3-108-465 |
| 10 | white | non-illuminated | 10 | Medical Version (M5) | I | black | Screw-on B | IP40 | 3-118-982 |
| 15 | white | non-illuminated | 15 | Medical Version (M5) | I | black | Screw-on A | IP40 | 3-109-588 |
| 10 | white | non-illuminated | 10 | Medical version (M5) with high inductance | I | black | Screw-on A | IP40 | 3-109-606 |
| 15 | white | non-illuminated | 15 | Medical version (M5) with high inductance | I | black | Screw-on A | IP40 | 3-109-607 |

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit

10 Pcs

Accessories

Description



RC320
Rear Cover for Power Entry Module

Mating Outlets/Connectors

Category / Description

Appliance Outlet Overview complete



| | |
|--|------|
| 4787, Mounting: Screw-on mounting, Appliance Outlet: IEC Solder terminals, 10 A, Suitable for appliances with protection class I | 4787 |
| 4788, Mounting: Snap-in version, Appliance Outlet: IEC Solder / Quick Connect, 10 A, Suitable for appliances with protection class I | 4788 |
| IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder, PCB or Quick-connect Terminal | 5091 |

Connector Overview complete



| | |
|---|---------|
| 4782 Mounting: Power Cord, 3 x 1 mm ² / 3 x 18 AWG, Cable, Connector: IEC C13 | 4782 |
| 4785 Mounting: Power Cord, 3 x 1 mm ² / 3 x 18 AWG, Cable, Connector: IEC C13 | 4785 |
| 4300-06 Mounting: Power Cord, 3 x 1 mm ² / 3 x 18 AWG, Cable, Connector: IEC C13 | 4300-06 |
| 4781 Mounting: Power Cord, Cable, Connector: IEC C15 | 4781 |
| 4784 Mounting: Power Cord, 3 x 1 mm ² / 3 x 18 AWG, Cable, Connector: IEC C15 | 4784 |

...

Mating Outlets/Connectors shuttered

Connector Overview complete



| | |
|--|------|
| 4783 Mounting: Power Cord, 3 x 1 mm ² / 3 x 18 AWG, Cable, Connector: IEC C13 | 4783 |
|--|------|

Power Cord Overview complete



| | |
|---|---------|
| VAC13KS, Overview, V-Lock cord retaining, diverse Connector IEC C13, diverse, black | VAC13KS |
|---|---------|